



Deckenleuchten | 220-240 V | 104 topLED 19 W DC - 23 W AC | CRI 90
8136

Double emission ceiling lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 104 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2189 lm, with a 115.2 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of pe. The ingress protection degree is IP40; the total weight is of 2.54 kg.

The total absorbed power is 23 W.

The device features protection class I and can be ceiling-mounted.



Compliant with the EN 60598-1 standard and its specific provisions.


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	75 %
Lichtstrom (Lichtquelle)	2189 lm
Leuchten Lichtstrom	1651 lm
Consumption	23 W
Leuchten Lichtausbeute	71 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25

LED Life / Failure Ratio	
L80 B20 C0 80000h	

UGR	
UGR axial	14.5
UGR transversal	15.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Light distribution simmetry	Symmetrical 2
Optik C0/C180	117°
Optik C90/C270	110°

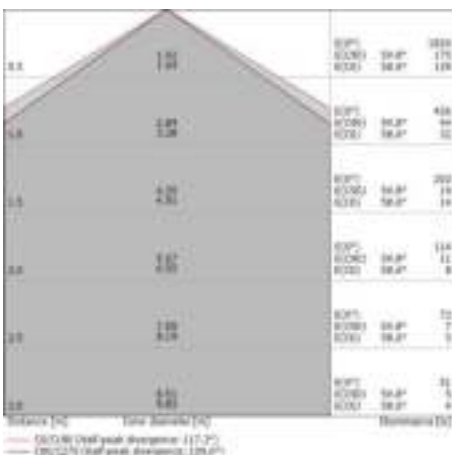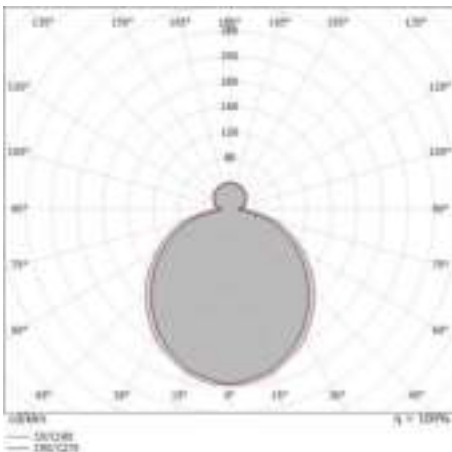



Dimmer
220-240V

Code
KIT0026



Dimmer
Radio-frequenza, 85-240V

Code
KIT0080