

ZIRKOL – C

ZIRKOL – C is a family of circular suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version or with double light emission with high flux and different colour temperatures.

Remote driver and dimmer interface included



HOME Ø 0,85M | DOWNLIGHT - 2700K

LAMPING

Source	linear LED
Total power	35W
Emission	diffused orientable
Switching	DALI 1-100%
Tension	110-240V
Color temperature	2700K
Luminous flux	2000lm
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED075/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled RAL 9005 black, RAL 9016 white optional accessories and customizable features
Customization options	
Accessories	Canopy, for concrete ceiling
Net lamp weight	3 kg

Codes

BZRC1608G15DBO

BZRC1608G15DNE

BZRC1608G15DOR

Structure

white

black

matte gold


PACKAGE

Package 01

Dimension: 110x110x10,30 cm / Gross weight: 5,5 kg

Certificazioni

CIRCLE HOME 0,85-1-1,5m




Ø85/100/150


CIRCLE 2-3-5m



Ø200



Ø300

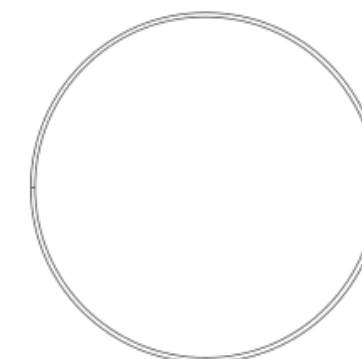

Ø500

HOME Ø 0,85M | UP-DOWNLIGHT - 2700K

LAMPING

Source	linear LED
Total power	70W
Emission	diffused orientable
Switching	DALI 1-100%
Tension	110-240V
Color temperature	2700K
Luminous flux	4000K
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED075/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled RAL 9005 black, RAL 9016 white
Accessories	Canopy, for concrete ceiling
Net lamp weight	3 kg

Codes

BZRC1708G15DBO
BZRC1708G15DNE
BZRC1708G15DOR

Structure


white
black

PACKAGE

Package 01 Dimension: 110x110x10,30 cm / Gross weight: 5,5 kg

Certificazioni

CIRCLE HOME 0,85-1-1,5m




Ø85/100/150


CIRCLE 2-3-5m



Ø200



Ø300

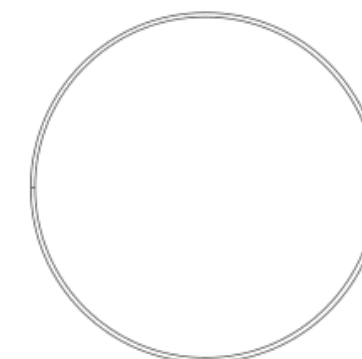

Ø500

HOME Ø 0,85M | DOWNLIGHT - 3000K

LAMPING

Source	linear LED
Total power	35W
Emission	diffused orientable
Switching	DALI 1-100%
Tension	110-240V
Color temperature	3000K
Luminous flux	2200lm
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED075/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled RAL 9005 black, RAL 9016 white
Accessories	Canopy, for concrete ceiling
Net lamp weight	3 kg

Codes

BZRC1608G15WBO
BZRC1608G15WNE
BZRC1608G15WOR

Structure


white
black
matte gold

PACKAGE



Package 01 Dimension: 110x110x10,30 cm / Gross weight: 5,5 kg

Certificazioni

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

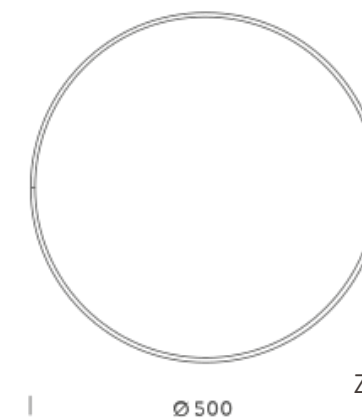

HOME Ø 0,85M | UP-DOWNLIGHT - 3000K

LAMPING

Source	linear LED
Total power	70W
Emission	diffused orientable
Switching	DALI 1-100%
Tension	110-240V
Color temperature	3000K
Luminous flux	4400lm
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED075/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled RAL 9005 black, RAL 9016 white
Accessories	Canopy, for concrete ceiling
Net lamp weight	3 kg

Codes

BZRC1708G15WBO
BZRC1708G15WNE
BZRC1708G15WOR

Structure


white
black
matte gold

PACKAGE

Package 01 Dimension: 110x110x10,30 cm / Gross weight: 5,5 kg

Certificazioni

CIRCLE HOME 0,85-1-1,5m




Ø85/100/150


CIRCLE 2-3-5m



Ø200



Ø300

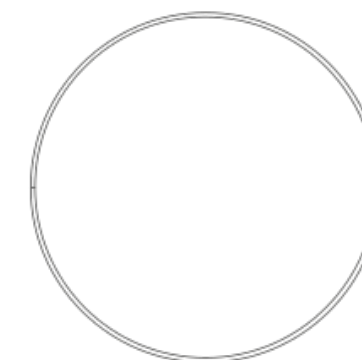

Ø500

HOME Ø 0,85M | DOWNLIGHT - 4000K

LAMPING

Source	linear LED
Total power	35W
Emission	diffused orientable
Switching	DALI 1-100%
Tension	110-240V
Color temperature	4000K
Luminous flux	2360lm
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED075/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled RAL 9005 black, RAL 9016 white
Accessories	Canopy, for concrete ceiling
Net lamp weight	3 kg

Codes

BZRC1608G15NBO
BZRC1608G15NNE
BZRC1608G15NOR

Structure


white
black
matte gold

PACKAGE

Package 01 Dimension: 110x110x10,30 cm / Gross weight: 5,5 kg

Certificazioni

CIRCLE HOME 0,85-1-1,5m




Ø85/100/150


CIRCLE 2-3-5m



Ø200



Ø300

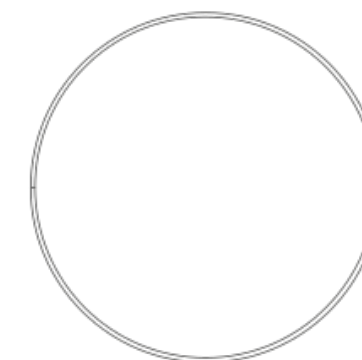

Ø500

HOME Ø 0,85M | UP-DOWNLIGHT - 4000K

LAMPING

Source	linear LED
Total power	70W
Emission	diffused orientable
Switching	DALI 1-100%
Tension	110-240V
Color temperature	4000K
Luminous flux	4720lm
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED075/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled RAL 9005 black, RAL 9016 white
Accessories	Canopy, for concrete ceiling
Net lamp weight	3 kg

Codes

BZRC1708G15NBO
BZRC1708G15NNE
BZRC1708G15NOR

Structure


white
black
matte gold

PACKAGE

Package 01 Dimension: 110x110x10,30 cm / Gross weight: 5,5 kg

Certificazioni

CIRCLE HOME 0,85-1-1,5m




Ø85/100/150


CIRCLE 2-3-5m



Ø200



Ø300

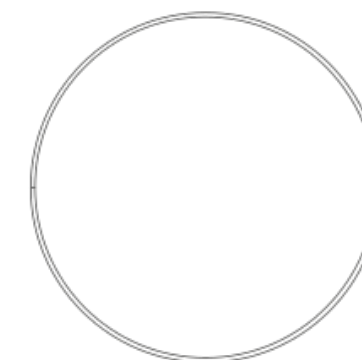

Ø500