

Table lamp for indirect lighting with a 4 W LED source. Light intensity is adjustable through a touch dimmer on metal base. Aluminium structure with transparent glass diffuser.

Finishing

Standard

- Anodised black
cod. 14101X000
- Anodised brass
cod. 14150X000

All RAL coating and galvanic finishes available upon request

Light emission



- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 350 lm
- Emitted flux: 73 lm
- Efficacy: 12,1 lm/W
- CCT: 3000K
- CRI index: >90
- Lifetime: >50000h L70 @ 25°C

Electrical Facts

- Source power: 4 W
- Power absorption: 5 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal dimmer with touch-on-metal interface
- Energy class: A++

Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,25 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

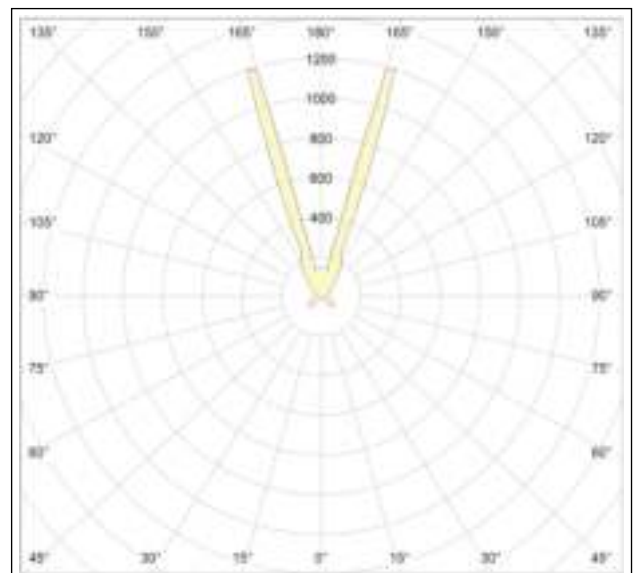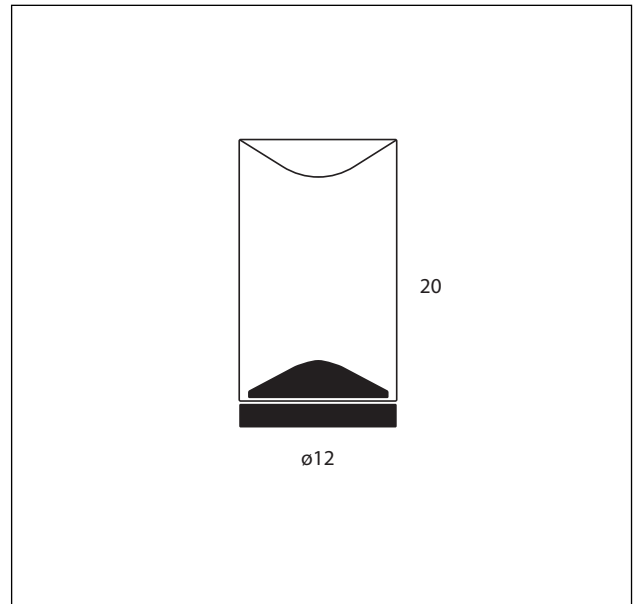

Packaging
cardboard box
21 x 21 x 27 (cm)
0,012 m³

Gross weight
1,7 Kg




Table lamp for indirect lighting with a 4 W LED source. Light intensity is adjustable through a touch dimmer on metal base. Aluminium structure with transparent glass diffuser.

Finishing

Standard

Anodised black
cod. 14101X0K27

Anodised brass
cod. 14150X0K27

All RAL coating and galvanic finishes available upon request

Light emission



- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 330 lm
- Emitted flux: 70 lm
- Efficacy: 11,6 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >50000h L70 @ 25°C

Electrical Facts

- Source power: 4 W
- Power absorption: 5 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal dimmer with touch-on-metal interface
- Energy class: A++

Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,25 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

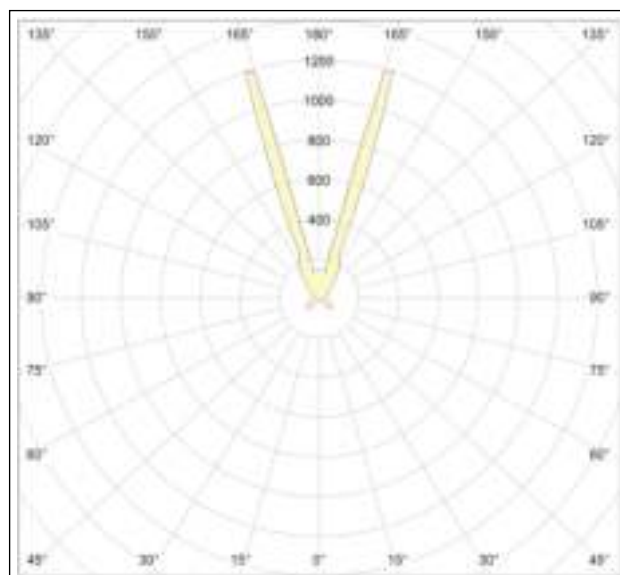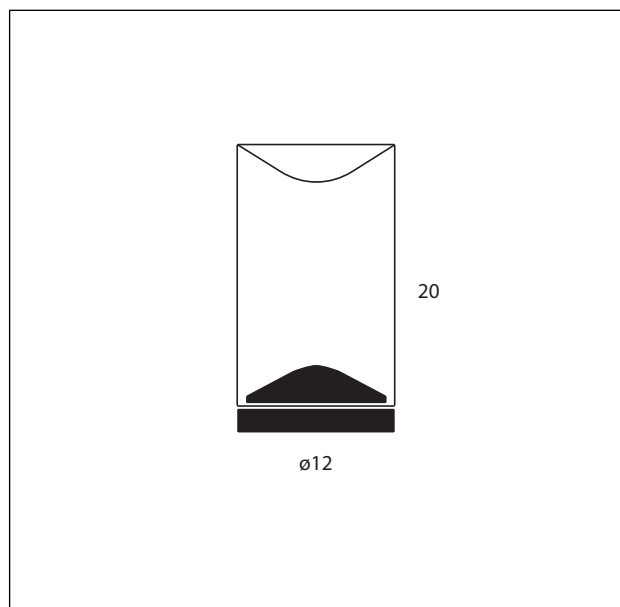

Packaging
cardboard box
21 x 21 x 27 (cm)
0,012 m³

Gross weight
1,7 Kg