








Suspension with aluminium shade and an integrated 18W light engine at the centre with a specially developed lens  
The metal parts are made in lathed aluminium  
1-10V dimming or DALI dimming compatible (AC-DC converter provided)

### Finishing

-  Matt Black  
cod. 181D01OP00
-  Oxygen red  
cod. 181D35ST00
-  Matt white  
cod. 181D02UM00
-  Battersea green  
cod. 181D28BG00
-  Metallic Bronze  
cod. 181D29MT00
-  Sapphire blue  
cod. 181D06ZA00
-  Matt brushed aluminium  
cod. 181D34OP00



### Light emission

- **Light emission:** diffuse
- **Light direction:** downlight
- **Light source:** LED board
- **Source flux:** 1981 lm
- **Emitted flux:** 873 lm
- **Efficacy:** 48,5 lm/W
- **CCT:** 3000 K
- **CRI index:** 97
- **Lifetime:** >55000h L80 @ 25°C

### Electric facts



- **Source power:** 18W
- **Power absorption:** -
- **Stand-by absorption:** <1 W
- **Grid voltage:** DC CC 700mA @ ~36V
- **Power supply:** internal AC-DC converter provided
- **Dimmability:** 1-10V, Dali compatible
- **Energy class:** A++ → E

### Technical data

- **Environment:** indoor
- **Placement:** pendant
- **Net weight:** 1,8 Kg
- **Certifications:** CE
- **Suggested ambient:** 25 °C
- **Maximum ambient T:** 40 °C
- **Insulation class:** I
- **Protection class:** IP20





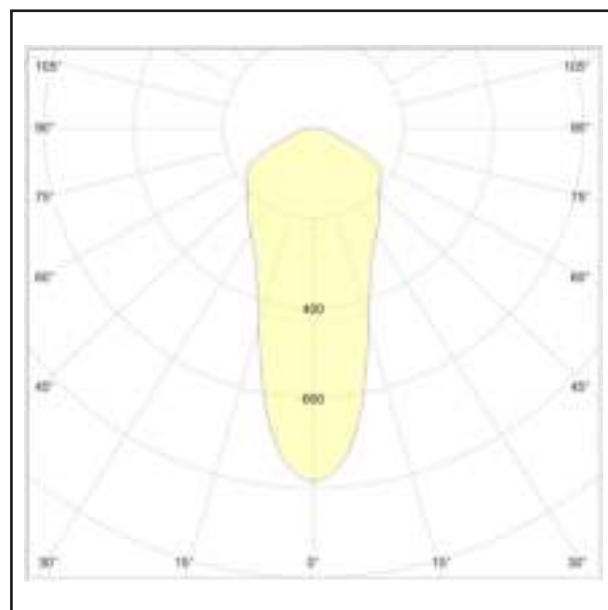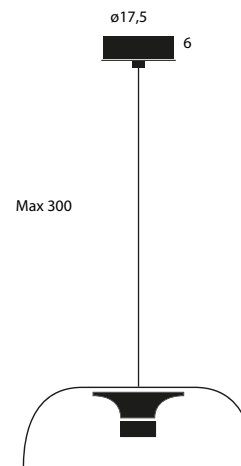


### Packaging

- **Material:** cardboard box
- **Dimensions:** 46 x 46 x 27 (cm)
- **Volume:** 0,057 m<sup>3</sup>
- **Gross weight:** 3,2 Kg



Suspension with aluminium shade and an integrated 18W light engine at the centre with a specially developed lens  
The metal parts are made in lathed aluminium  
1-10V dimming or DALI dimming compatible (AC-DC converter provided)

### Finishing

-  Matt Black  
cod. 181D01OPK27
-  Oxygen red  
cod. 181D35STK27
-  Matt white  
cod. 181D02UMK27
-  Battersea green  
cod. 181D28BGK27
-  Metallic Bronze  
cod. 181D29MTK27
-  Sapphire blue  
cod. 181D06ZAK27
-  Matt brushed aluminium  
cod. 181D34OPK27



### Light emission

- **Light emission:** diffuse
- **Light direction:** downlight
- **Light source:** LED board
- **Source flux:** 1904 lm
- **Emitted flux:** 839 lm
- **Efficacy:** 46,61 lm/W
- **CCT:** 3000 K
- **CRI index:** 97
- **Lifetime:** >55000h L80 @ 25°C

### Electric facts

- **Source power:** 18W
- **Power absorption:** -
- **Stand-by absorption:** <1 W
- **Grid voltage:** DC CC 700mA @ ~36V
- **Power supply:** internal AC-DC converter provided
- **Dimmability:** 1-10V, Dali compatible
- **Energy class:** A++ → E

### Technical data

- **Environment:** indoor
- **Placement:** pendant
- **Net weight:** 1,8 Kg
- **Certifications:** CE
- **Suggested ambient:** 25 °C
- **Maximum ambient T:** 40 °C
- **Insulation class:** I
- **Protection class:** IP20

### Packaging

- **Material:** cardboard box
- **Dimensions:** 46 x 46 x 27 (cm)
- **Volume:** 0,057 m<sup>3</sup>
- **Gross weight:** 3,2 Kg

